




ForceField® FAST TACK UPHOLSTERY ADHESIVE

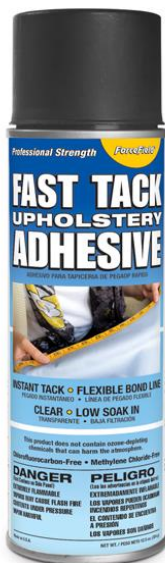

OVERVIEW

ForceField™ Fast Tack Upholstery Adhesive is designed for a wide range of upholstery and craft applications that might include bonding together any combination of fabric, foam, wood, particle board, cardboard, metal, paper, drywall, masonry, or fiberglass. This product has a low soak-in formulation that provides almost instant tack, and a clear flexible bond that can be temporary to permanent depending upon both the quantity applied and the nature of the substrate.

APPLICATION

Always test for suitability by applying **Fast Tack Upholstery Adhesive** to a small sample of the materials to be bonded. For best results, apply to new or clean dry surfaces. As this is a solvent-based product, exercise proper caution by applying either outdoors, or in a well-ventilated area. Do not spray near flame, sparks, heated surfaces, or other potential sources of ignition. Avoid excessive airborne mist. Shake the container well prior to use. Spray while holding the container 8 to 12 inches away from the surface to be treated. It is best to keep the container moving to achieve an even coating of the surface. Allow **Fast Tack Upholstery Adhesive** to dry to a tack, and bond surfaces together using uniform pressure to assure maximum adhesion.

Notes:

- For a permanent bond, both surfaces to be joined should be sprayed.
- For a temporary or repositionable bond apply to only one surface.
- If substrates are porous, it may be necessary pre-treat the surface by application of a “sealer” coating of the adhesive and allowing it to dry, prior to applying the bonding coat.

For typical applications, coverage is 1 ounce per 6 to 8 square feet of surface. Bonding time can range from 10 seconds to two minutes, depending upon ambient conditions, the substrates being bonded, and the application rate.

AVAILABLE IN THE FOLLOWING SIZE



12 oz. Aerosol Spray

- **Perfect for Upholstery Application & Numerous Craft Projects**
- **Use on a Wide Range of Surfaces (Fabric, Foam, Wood, Metal, Paper)**
- **Instant Tack**
- **Flexible Bond Line**
- **Low Soak-In Rate**
- **Chlorofluorocarbon-Free & Methylene Chloride-Free**

HMIS Health: 2 Fire: 4 Reactivity: 1	Appearance: White Liquid (when wet), Clear (when dry)
pH: NA (Solvent Based Product)	Odor: Mint (when wet)
Solubility: Negligible	Specific Gravity: 0.6867 +/- 0.0005 (5.72 lbs/gal)
Boiling Point: -159°F to -44°F (Flashpoint -156°F)	Chemical Family: Aerosol Adhesive
Storage: Below 120°F, Well-ventilated	Caution: Keep out of the reach of children.
Regulatory: Consumer Commodity (ORM-D) for Ground/Vessel Transport, (ORM-D AIR) for Air Shipment	Danger: Extremely Flammable - Level 3 Aerosols, Avoid Flame. Contents Under Pressure, Vapor Harmful
Heat Resistance: Max. Service Temp. 120°F	Solvent System: Hexane & Acetone Blend
Solids: 23% +/- 2%	Propellant: DME & Hydrocarbon Blend
VOC Content: 54.0% By Weight	VOC Compliant for CA & OTC: Yes

